



# DLC Xtended®

## TECHNICAL DATA SHEET

### **DLC Xtended®:**

DLC stands for diamond like carbon and it is a carbon-based hard material layer with excellent sliding properties.

### **Coating of metallic materials for:**

→ Plastics processing industry, mechanical engineering, chemical industry, precision components, safety technology, etc.

### **Application:**

- wear protection
- corrosion protection
- minimization of friction
- decorative purposes
- as a chrome alternative

### **Coatable materials:**

Engineering steels, nitriding steels, stainless steels  
Concrete coordination about the material is done through our customer service.

### **Main features:**

- water-repellent / oil-repellent
- high degree of chemical resistance
- electrically insulating
- very low friction coefficient

### **Dimensions of the largest coating system:**

- Ø 1,500 mm / 2,400 mm in height

### **Possible preparation of the surfaces for an optimal coating result:**

#### by customer:

- metallic blank surface
- no corrosion
- clean cooling channels
- no strain hardening through by e.g. mechanical processing

#### by RUBIG (optional):

- micro-blasting
- bake-out

### **Required Information:**

- Material (optionally tempering temperature including heat treatment condition)
- Definition of surfaces
  - Coating area:  
the area to be coated
  - Footprint:  
on which the component is placed on the charging frame and thus not coated
  - Covering areas:  
surfaces that must not be coated
- Are we allowed to perform micro blasting?


### **Optional information:**

- Area of application of the component or tool
- Objective for the coating
- Last processing steps


We advise you individually on your component.

### Layer structure

#### DLC Xtended®

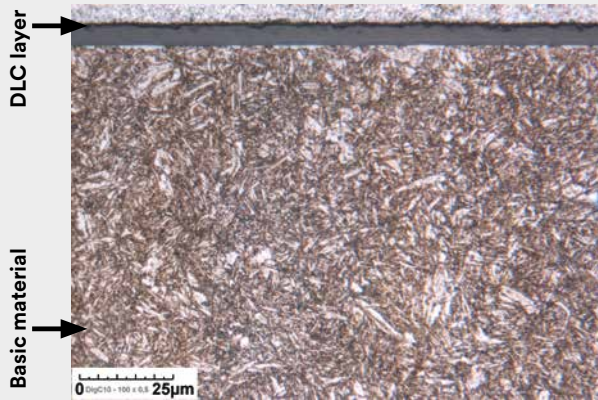

#### Duplex DLC Xtended®

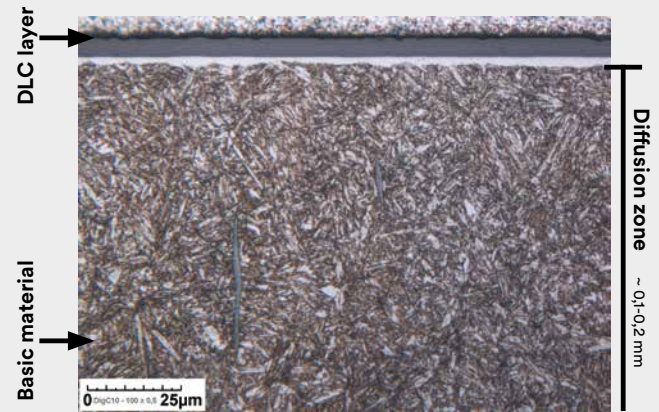

### Coating temperature

450 °C applicable for steels with  
Tempering temperature > 480 °C

500 °C applicable for steels with  
Tempering temperature > 520 °C

Can be adapted to the material if required.

### Coating type

a-C:H:Si (amorphous carbon layer containing hydrogen and silicon); The deposition takes place by means of PACVD method (plasma-assisted chemical vapor deposition).

### Typical application

- wear protection
- corrosion protection
- minimization of friction
- decorative purposes

### Hardness [HV]

	min	max
DLC Xtended®	800	2,500

different hardness ranges on request

### Characteristics

Friction *	$\mu = 0,04 - 0,1$
Optics	black, anthracite shiny or dull

(depending on the component surface)

\* dry, counter body 100Cr6, polished

### Layer thickness [µm]

	min	max
DLC Xtended®	3	15

individual layer thickness on request

### Features

wear resistance	+
run-in behavior	+
gliding	++
start-stop	+
corrosion resistance	+

### Roughness [µm]

The roughness depends on the surface condition of the component to be coated and increases slightly with the coating.